



Submittal Manager

FOR P&M DISTRIBUTORS

TRIM 50-75% OFF TIME IT TAKES TO CREATE SUBMITTALS

How it works: Our database contains over a million up-to-date catalog pages, installation instructions, specification and MSDS sheets for the plumbing/mechanical industry. You simply load your contractor's list of UPC numbers and it's matched against our database. Matches are returned in seconds with the most current catalog pages so you no longer have to hunt down every last one and are automatically filed in the MasterFormat®.

WE MAKE IT EASY

Every job is different, but many times the materials used aren't. Submittal Manager™ lets you store frequently used and edited pages. These user-created 'templates' can then be reused in future jobs so you don't need to repeat the same work over and over


on parts you use all the time. If you need to use a manufacturer's configurator to prepare a custom page, simply save the page as a PDF and Submittal Manager™ will pull it directly into the job for you.

A COMPLETE SUBMITTAL SOLUTION

We include mark-up tools that are comprehensive but simple to use so you can point arrows, highlight or sticky-note as much as you need to. Present your submittal package professionally using our built-in formatting options: Table of Contents, page numbering, stamps, or even a company logo added to every page. You can include header and footer sections, cover pages, dividers and tabs to make it a very clean document that's easy to read and one that will impress your customer. Send it via email as a PDF to not only save time, but also save on paper and shipping costs.

Top Benefits

- Library of 1 million plumbing/mechanical items with catalog pages & technical specifications
- Uploading your item list to Submittal Manager automatically finds and **adds corresponding catalog pages** directly to your submittal
- Create templates** of your most frequently used items so that you can quickly copy them into new submittals
- Classify documents to the industry standard **CSI MasterFormat®**
- Comprehensive tools to **mark-up your PDFs**
- Formatting options** allow you to add job information, company logos, headers/footers and numbers to each page

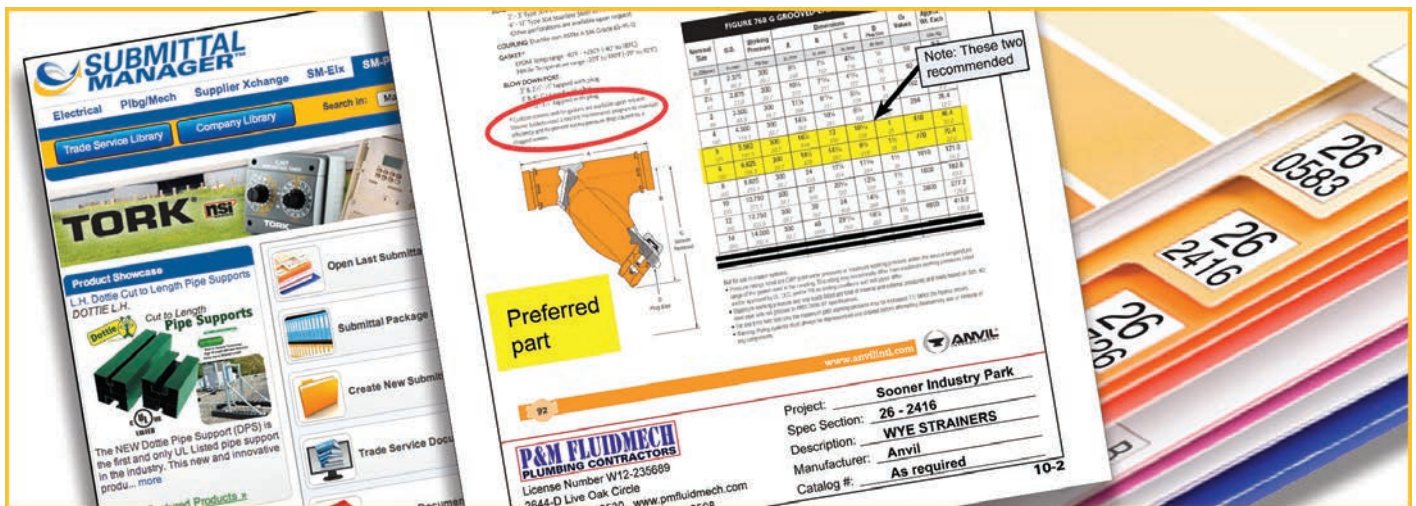

DYNAMIC TOOLS AT YOUR DISPOSAL

Not only do you have access to over a million up-to-date catalog pages (such as this sample page) from our database, but we also provide you with a host of dynamic tools to mark them up to your specifications. You can even upload your own image and stamp it on to the page wherever you want. Shown here are just a few examples of the ways you can mark up a document.

Submittal Manager generates a table of contents and automatically keeps it up to date as you make changes. This saves you countless hours when the addition of last-minute pages would normally mean having to completely redo the whole table of contents. If you want to shave up to **75% off the time** it takes to produce your submittals, examine the tools highlighted on this image.

Table of Contents

Auto-generates and auto-updates.

Hotlinked PDFs

Create PDFs with automatically linked manufacturer names and document titles.

Spec #	Section	Type	User Description	Doc #
15000	Mechanical Systems	Pipe	Type L Hard Copper Tube	1
15140	CHWS/R	Pipe Branch Connection	3000# Forged Steel Weld-O-Let and Thread-O-Let	2
cuXBW		Air Vent	107A - High Capacity Air Vent	3
Anvil		Valve	Circuit Setter	4
Bell & Gossett		Pump Accessory	Suction Diffuser	5
Bell & Gossett		Gasket	150# Full Face Gasket	6
Flexitallic		Strainer	Cast Iron Y-Strainer	7
Keckley		Expansion Joint	Flex Connection	8
Metraflex		Valve	Class 150 200PSI Butterfly Valve Lug style	9
Nibco		Check Valve	Class 125lbs 200 PSI Check Valve	10

VALVES AND ACCESSORIES

MODEL 768G

Globally Sourced Grooved-end "Wye" Strainer

The Grooved-end Wye-Strainers are designed to strain debris and foreign matter from piping systems and thus provide inexpensive protection for costly pumps, meters and other components. The Strainer can be installed quickly and easily with two mechanical couplings and the straight flow through design provides for lower pressure drop. This strainer features a stainless steel screen that is secured with an end cap and mechanical coupling. Cleaning and maintenance of the screen can be accomplished easily by removing the coupling. The Strainer is suitable for vertical and horizontal installations.

Preferred part

MATERIAL SPECIFICATIONS

BODY: Ductile iron ASTM A 536 Grade 65-45-12
END CAP: Ductile iron ASTM A 536 Grade 65-45-12
SCREEN:
 2" - 3" Type 304 Stainless Steel to ASTM A 240 - 1/16" (1.6 mm) perforations
 4" - 12" Type 304 Stainless Steel to ASTM A 240 - 1/8" (3.2 mm) perforations
 Other perforations are available upon request
COUPLING: Ductile iron ASTM A 536 Grade 65-45-12
GASKET:
 EPDM Temp range -40°F - +230°F (-40° to 110°C)
 Viton Temp range -20°F to 180°F (-29° to 82°C)

BLOW DOWN PORT:
 2" & 2 1/2" 1/2" tapped with plug.
 3" & 4" 1" tapped with plug.
 6" - 12" 1 1/2" tapped with plug.

Values for flow of water at +60°F (+16°C)

$$C_v = \frac{Q}{\sqrt{\Delta P}}$$

Where:
 Q = Flow (GPM)
 C_v = flow coefficient
 ΔP = Pressure drop (PSI)

Note: Confirm the pressure drop

FIGURE 768 G GROOVED-END "WYE" STRAINER									
Nominal Size	Working Pressure			Dimensions				Cv Values	Approx. Wt. Each
	in./mm	in./mm	PSI/bar	A	B	C	D Plug Size		
2	2.375	300	9 3/4	7 1/4	4 9/16	1/2	59	9.3	
50	60.3	20.7	248	192	116	12	4.2	4.2	
2 1/2	2.875	300	10 3/4	7 3/4	4 9/16	1/2	92	13.2	
65	73.0	20.7	273	211	122	12	6.0	6.0	
3	3.500	300	11 3/4	8 1/4	5 1/4	1	162	18.0	
80	88.9	20.7	298	237	129	25	8.2	8.2	
4	4.500	300	14 1/4	10 3/4	6 1/4	1	284	26.4	
100	114.3	20.7	362	281	168	25	12.0	12.0	
5	5.563	300	16 1/4	13	10 3/4	1	410	46.4	
125	141.3	20.7	419	330	258	25	22.0	22.0	
6	6.625	300	18 1/4	14 1/4	8 1/4	1 1/2	770	70.4	
150	168.3	20.7	470	357	219	38	32.0	32.0	
8	8.625	300	24	17 1/4	11 1/4	1 1/2	1010	121.0	
200	219.1	20.7	610	454	284	38	55.0	55.0	
10	10.750	300	27	20 3/4	12 1/4	1 1/2	1800	182.6	
250	273.1	20.7	686	522	320	38	83.0	83.0	
12	12.750	300	30	24	14 1/4	1 1/2	2800	277.2	
300	323.9	20.7	762	609	368	38	126.0	126.0	
14	14.000	300	40	29 1/4	18 1/4	1 1/2	4600	418.0	
350	355.6	20.7	1016	760	480	38	190.0	190.0	
16	16.000	300	42	30 3/4	19	1 1/2	5800	495.0	

Not for use in copper systems.
 • Pressure ratings listed are CWP (cold water pressure) or maximum working pressure within the service temperature range of the gasket used in the coupling. This rating may occasionally differ from maximum working pressures listed and/or approved by U.L., U.L.C., and/or FM as testing conditions and test pipes differ.
 • Maximum working pressure and end loads listed are total of internal and external pressures and loads based on Sch. 40 steel pipe with roll grooves to ANSI C606-97 specifications.
 • For one time field test only the maximum joint working pressure may be increased 1 1/2 times the figures shown.
 • Warning: Piping systems must always be depressurized and drained before attempting disassembly and/or removal of any components.

92

www.anvilintl.com

P&M FLUIDMECH

PLUMBING CONTRACTORS

License Number W12-235689
 2644-D Live Oak Circle
 Jackson, OK 42530 www.pmfluidmech.com
 Ph 012-786-8599, FAX 012-786-8598

Project: Sooner Industry Park

Spec Section: 26 - 2416

Description: WYE STRAINERS

Manufacturer: Anvil

Catalog #: As required

10-2

Sticky Notes

Iconic yellow notes allow you to draw attention to your comments.

Arrows

Use arrows to point to a specific item or image.

Text boxes

Text can be added in a variety of sizes and fonts.

Geometric Shapes

Create and format geometric shapes to emphasize certain areas.

Highlighter

Apply highlighting to an area. Several colors available, including grayscale for better printing if in black and white.

Blackout

Strikethrough allows you to cross things out completely.

Headers & Footers

Header and/or footer templates can be set up to include your company information and logo, as well as vital project details. The header/footer is added to every page, and product specific information is automatically applied.

Pagination

Automatically number the pages of your entire submittal. Switch things up, and the page numbers will automatically adjust.

Submittal Manager

FOR P&M DISTRIBUTORS

ADDITIONAL BENEFITS

- Reduces the time it takes to do submittals by up to 75%
- Other documents in the library include: MSDS sheets, product specifications, and installation instructions
- Generates a checklist of your items to help keep you on track
- Cuts costs on paper, printing, and shipping by emailing submittal packages
- Submittals are permanently archived for instant access
- Permits ultimate control by allowing you to change the names, sequence, and categorization of documents and allows you to determine who can edit the package
- Web-based software means it can be utilized anywhere with an Internet connection
- Database is constantly updated with information direct from manufacturers

SYSTEM REQUIREMENTS

- Internet connection
- Microsoft® Internet Explorer 8.0 or greater Web browser, Chrome, Firefox
- Adobe® Acrobat® Reader 5.0 or greater

TRADE SERVICE
A TRIMBLE COMPANY
13280 Evening Creek Drive South, Suite 200
San Diego, CA 92128
USA

www.tradeservice.com
800-701-7003
distributor_sales@tradeservice.com

© 2016, Trade Service Company, LLC. All rights reserved. Trimble and the Triangle & Globe logo are trademarks of Trimble Navigation Limited, registered in the United States and other countries. All other trademarks are the property of their respective owners.